

# CP-602U-I Series

2-port CAN interface Universal PCI boards with 2 kV isolation



## Features and Benefits

- Supports CAN 2.0A and CAN 2.0B
- Two independent CAN communication ports
- CAN transfer rate up to 1 Mbps
- 2 kV electrical isolation
- LED for transmit/receive status on each port
- Optional 120-ohm terminal resistor for CAN bus network
- DLL library and examples included
- Windows driver provided

## Certifications



## Introduction

Moxa's CP-602U-I CAN (Controller Area Network) interface board supports the Universal PCI interface. As a standalone CAN controller, the CP-602U-I is a cost-effective solution that provides two active CAN controllers with a DB9 connector on the same board. The CP-602U-I CAN interface board uses the NXP SJA1000 and transceiver PCA82C251, which provide bus arbitration and error detection. The -40 to 85°C wide operating temperature (CP-602U-I-T only) and 2 kV isolation make the boards suitable for use in harsh industrial environments.

## Specifications

### CAN Interface

Baudrate	10/20/50/125/250/500/800/1000 kbps, user-defined
Connector	DB9 male
No. of Ports	2

### Environmental Limits

Operating Temperature	CP-602U-I w/o Cable: 0 to 55°C (32 to 131°F) CP-602U-I-T w/o Cable: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

### Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs

## Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

## MTBF

Time	1,989,990 hrs
Standards	Telcordia SR332

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x CP-602U-I Series serial board
Documentation	1 x document and software CD 1 x substance disclosure table 1 x warranty card

## Dimensions

Unit: mm (inch)

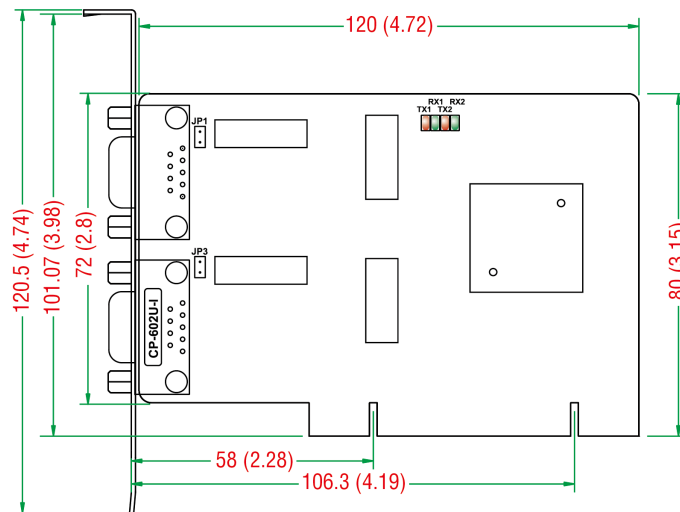

## Ordering Information

Model Name	Serial Bus	CAN Specification	No. of Serial Ports	Serial Isolation Protection	Operating Temp.
CP-602U-I w/o Cable	Universal PCI	CAN 2.0 A/B	2	2 kV	0 to 55°C
CP-602U-I-T w/o Cable	Universal PCI	CAN 2.0 A/B	2	2 kV	-40 to 85°C

## Accessories (sold separately)

### Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
-----------------	--

### Cables

CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m

© Moxa Inc. All rights reserved. Updated Jan 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.